





ZTA系列陶瓷谐振器

ZTA Series of Ceramic Resonator

Dimensions/外形尺寸

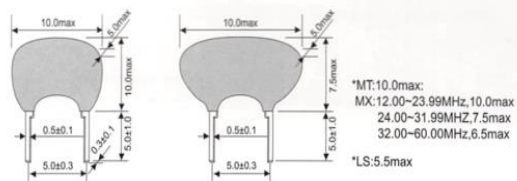

Test Circuit For MOS IC 测试电路(用于MOS IC)

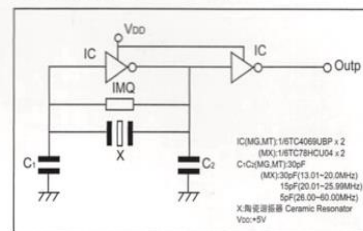

技术特性 Technical Characteristics


型号 Part Number	频率范围 Frequency Range (MHz)	频率精度 Frequency Accuracy (25℃)(%)	温度稳定性 Stability in Temperature (-20~+80℃)(%)	工作温度 Operating Temperature (℃)	老化率(10年) Aging For Ten Years (%)
ZTA□MG	1.79-6.00	±0.5	±0.3	-25~85	±0.3
ZATWS□MG	1.79-6.00	±0.5	±0.3	-25~85	±0.3
ZTALS□MG	3.00-8.00	±0.5	±0.3	-25~85	±0.3
ZTARS□MG	6.00-10.00	±0.5	±0.3	-25~85	±0.3
ZTA□MT	6.00-13.00	±0.5	±0.3	-25~85	±0.3
ZTA□□MX	12.00-60.00	±0.5	±0.3	-25~85	±0.3




ZTT系列内藏电容陶瓷谐振器

ZTT Series of Ceramic Resonator With Built-in Capacitor

Dimensions/外形尺寸

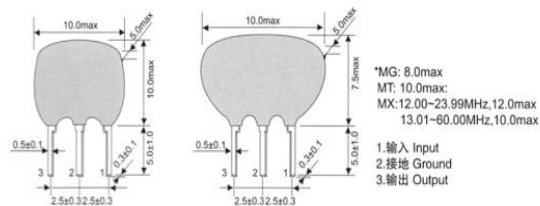

Test Circuit For MOS IC 测试电路(用于MOS IC)

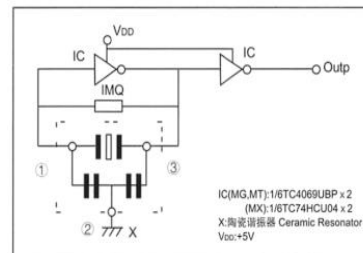

技术特性 Technical Characteristics

型号 Part Number	频率范围 Frequency Range (MHz)	频率精度 Frequency Accuracy (25℃)(%)	温度稳定性 Stability in Temperature (-20~+80℃)(%)	工作温度 Operating Temperature (℃)	老化率(10年) Aging For Ten Years (%)
ZTT□MG	1.79-6.00	±0.5	±0.3	-25~+85	±0.3
ZTTWS□MG	1.79-6.00	±0.5	±0.3	-25~+85	±0.3
ZTTLS□MG	3.00-8.00	±0.5	±0.3	-25~+85	±0.3
ZTTRS□MG	3.00-10.00	±0.5	±0.3	-25~+85	±0.3
ZTT□MT	6.00-13.00	±0.5	±0.3	-25~+85	±0.3
ZTT□MX	12.00-60.00	±0.5	±0.3	-25~+85	±0.3